WELCOME TO







20 Years Professional Car Parking Equipment Manufacturer + Parking Integrated Solution Provider

COMA Parking International Co.,LIMITED

http://www.comaparking.com/

Automatic payment Machine(APM)



- ✓ Can work with parking system as central payment machine inside the parking lot
- ✓ Can work with share flap parking lock, to collect the parking fee
- ✓ Module design,flexible to add the modular we want to use(bank card reader module, local transportation card,mobile payment etc)
 * need to integrate it
- ✓ Support over 120 countries and regions currency(bank notes and coins) (Accept and given changes)
- ✓ Support to read parking card, scan barcode ticket, input license plate number to pay
- ✓ Elegant design,come with Video Intercom and UPS power supply
- ✓ Support network, can integrate into existing parking system with the C#SDK we provide.




Latest Design



New Design 2023



Typital Wiring Diagram(For LPR System)

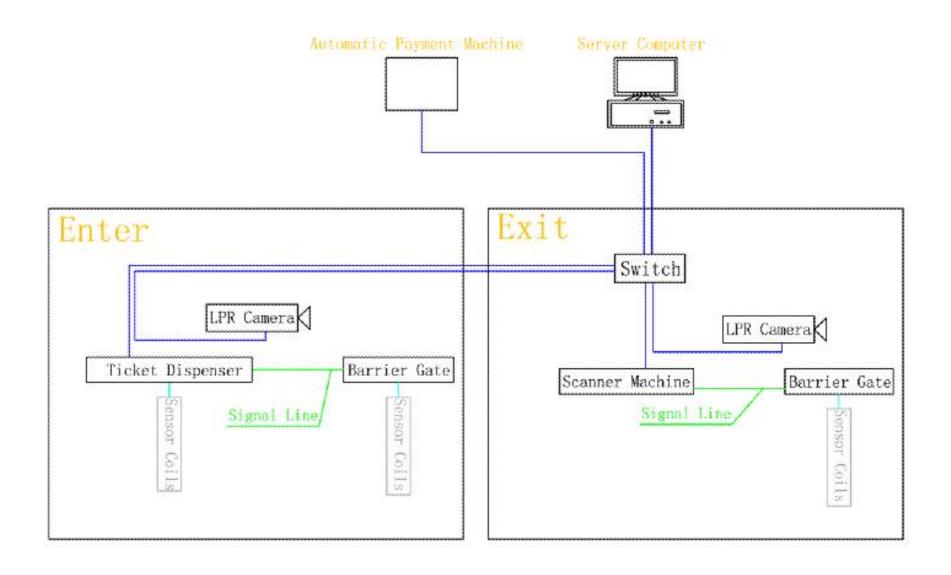


Interface-1




Input license plate to pay

Self-service parking payment machine provides you convenient service.


Interface-2

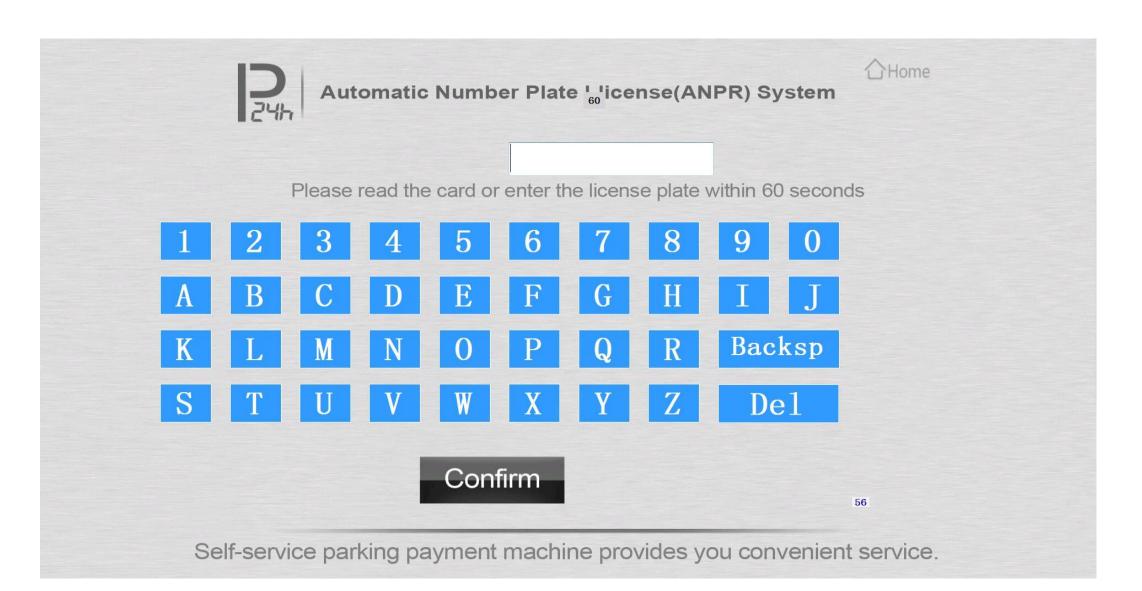

Interface-3

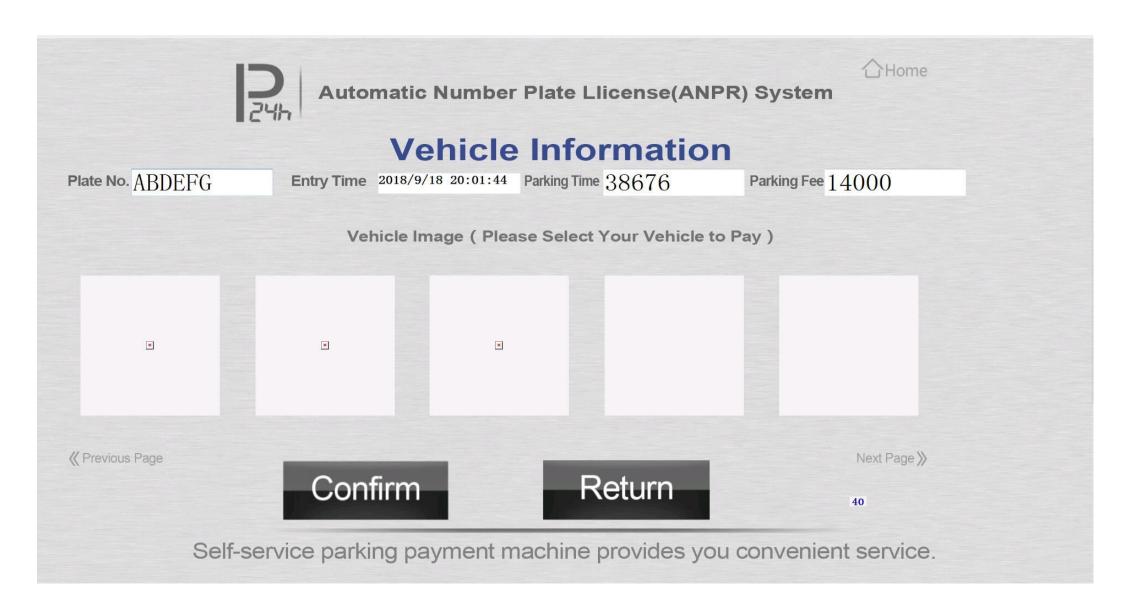

Management Interface

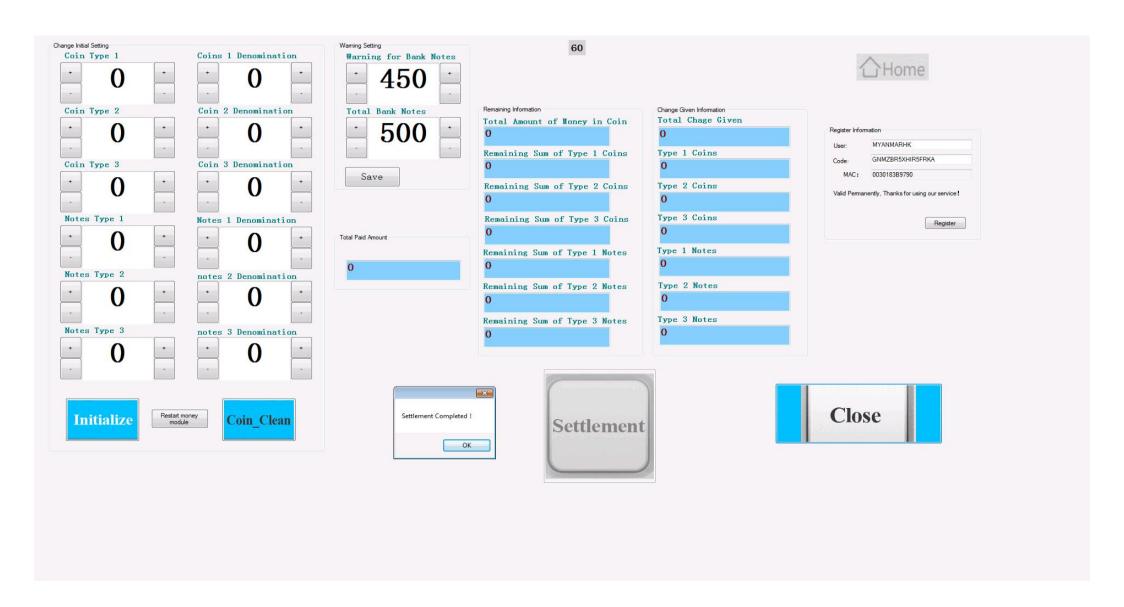


Inside Structure



Features of New Design

- * Two Doors design(front door and back door),more safe for payment, more convenient to maintainance
- * 2.0mm thickness steel structure, more robust, more safe
- * Code lock for all the money box, the one who do maintainance can not touch the money inside the APM
- * Available Video Intercom function
- * UPS power supply
- * Updated controller and system software
- * Bank card payment & mobile payment are available for dedicated countries and regions =>>

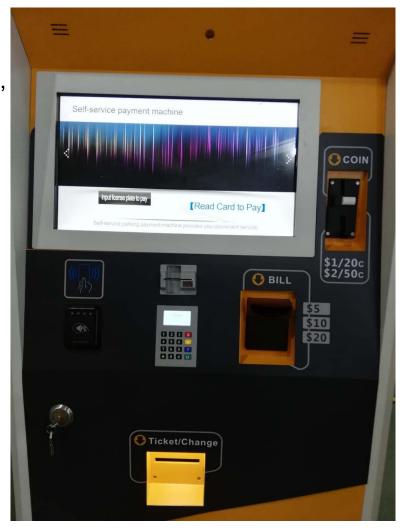

Bill acceptor







Bill changer












Coins acceptor and changer *



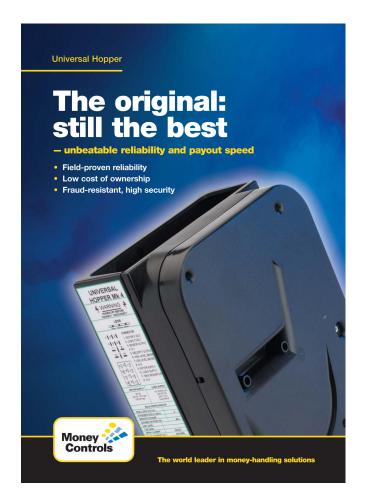

^{*} Only in case of accepting and changing coins are same denomination, it can be recycled


Paper Roller for Receipt









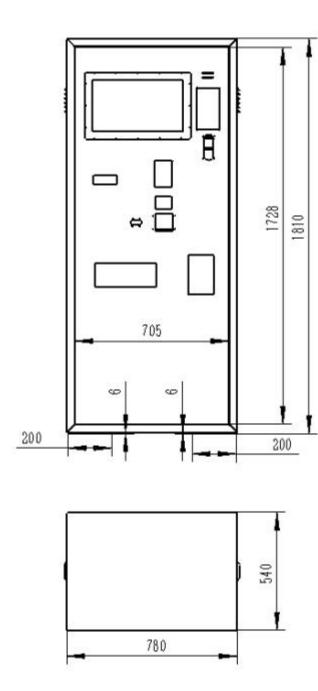

Model		CMZ-8001
System	Processor	J1900 4-cores, 2.0G
	Operating system	Windows 7/10
Input/output	Receipt printing	USB interface; Thermal printing, auto-cut (semi-cut); no-enough-paper alarm, Print span: 80 mm; Paper roll diameter: 150 mm
	Barcode scanner	Honeywell brand, Barcode scanning, laser net scanning (USB interface)
	Audio output	2-ch, effective output: 5 W
	Touch screen	18.5-inch LCD; Preventable against dust, fouling and violence; Accurate location without drifting
Interface	RS-232 serial interface	5
	USB interface	4
	VGA interface	1
	HDMI	1
	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface
Function	SSD capacity	128 G
	Display	Response time: 14 ms; Max. resolution: 1366 × 768, 32 Bit; Brightness: 1000cd/m²Contrast: 1000:1;
	Upload	The data can be uploaded to the central platform.
	Bank note identification	Cashbox containable with notes of multiple currency value; Precise identification of the currency value
	Bank note changes returning	1 to 2 cashboxes can be selected; Changes with up to 2 kinds of currency value can be returned; Self-checking function can prevent from returning overmuch notes and note jam caused by damp;
	Coin receiving	Coins of multiple currency value receivable
	Coin changes returning	Coins of multiple currency value returnable
Safety		
	Safe and Coded lock	For password configuration, guaranteeing safe cash receiving and returning of notes and coins; Thickness: 2 mm (for cash receiving and returning)
	Visual intercom	optional

General	Power supply	110/220V±10%, AC 50/60Hz	
	UPS	can provide power about 5minutes	
	Consumption	250W	
	Mechanical characteristics	In-hall structure; baking paniting body preventable against rust and corrosionThick and solid material, not easy to cause deformation; Internal structure in which each module can be maintained easily and conveniently; Standard and ordered wiring	
	Working environment	Environment temperature: -10 °C to +50 °C Relative humidity: 40 % to 80 % (uncompressed)	
	Applied location	For indoor use (keeping away from water)	
	Placement mode	Perpendicular to stable floor	
	Communication mode	TCP/IP	
	Switch	8 ports	
Dimension(mm)		780*540*1810 (without wheel)	
		780*540*1900 (with wheel)	

Package(wrapped with film,paper carton & wooden frame or case)



